


## PRMHE-300 Main Unit

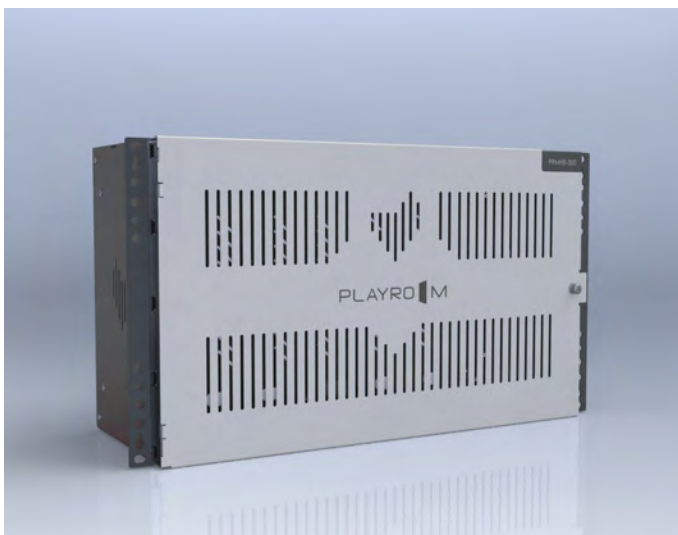

### PRODUCT DETAILS

Modular universal system for professional applications to satisfy all requirements of high quality channel processing from the IPTV systems.

### FEATURES

Slots for up to 8 modules	
Modern Interface	
Switch Mode power Supply	
Wall Mount or 19" Rack Mounting	
Universal AC input /Full range	
Protections	Short circuit Overload Over voltage Over temperature
Cooling by free air convection	
Simple programming of the individual modules	

### SPECIFICATIONS

Input voltage	187 - 250 V ~ 50/60 Hz
AC Current	max. 1.3 A / 230 VAC
Frequency range	47 - 2400 MHz
Input Impedance	75Ω
Storage Temperature	0°.. + 55°C
Operating temperature range	0°.. + 50°C
Max. Humidity, none-condensing	95%
Dimensions/Weight (packed)	442x267x190 mm/3 kg